


Extended length is with 500g of force

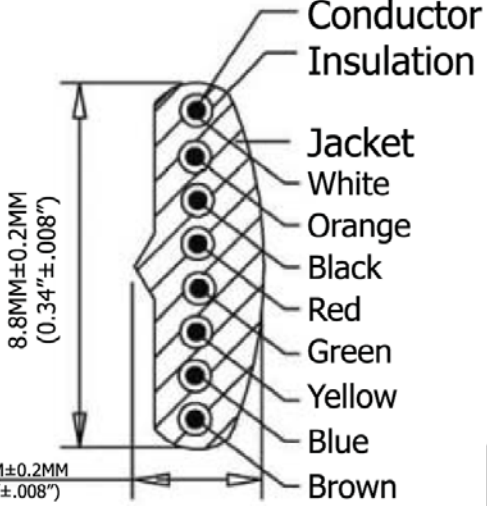

P1		P2
1	WHITE	8
2	ORANGE	7
3	BLACK	6
4	RED	5
5	GREEN	4
6	YELLOW	3
7	BLUE	2
8	BROWN	1

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	28.0 Inches
1,524.0MM-1,752.6MM	711.2MM

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainde
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

Unit: MM

**SEC: A-A**

Scale	1:1	Name	Chappell
<b>TOLERANCE</b>		Drawn	11.18.11
X.X	±0.40	Approved	
X.XX	±0.25		
X.XXX	±0.15		
Angle	±3°		
		<b>ASSMANN</b> W&S/W components	
		Modification	Date Name

<b>Item No.</b>	<b>AT-C-26-8/8/S-5</b>	
<b>Title</b>	NON-UL 26 AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Standard Plug, 50µ" of contact plating, Silver	
<b>Drawing No.</b>		<b>rev00</b>
<b>Replace</b>		Sheet

