


A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H
A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	

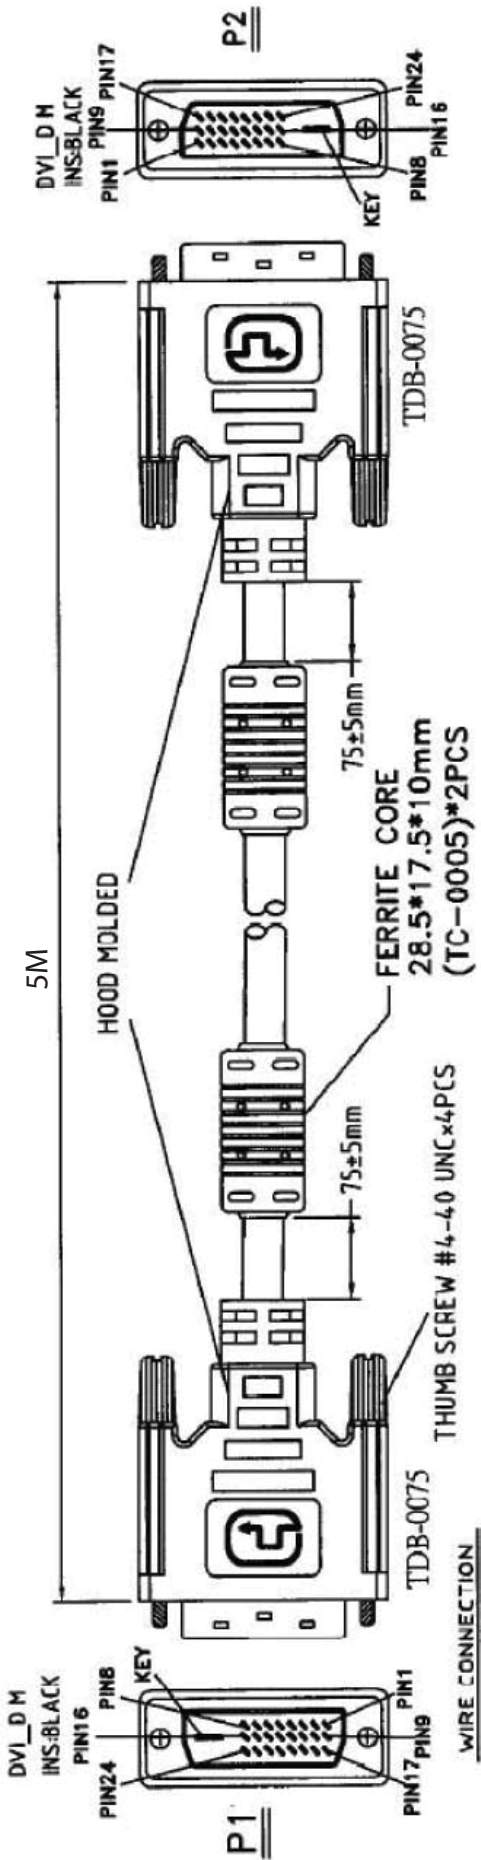

WIRE CONNECTION	
P1	P2
1	1
2	2
3	3
3	3
4	4
5	5
6	6
7	7
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
19	19
20	20
21	21
22	22
23	23
24	24
SHELL	BRAID SHIELDS
	SHELL

**Material:**

- Cable: UL20276 [28AWG(7/0.127 T.C)\*1Pair+Drain Wire+AL/Mylar+Mylar]\*7C +28AWG(7.0.127 T.C)\*1Pair+28AWG(7/0.127 T.C)\*3C+ALMY+D.W(0.127)+Braid Shields(85%)
- PVC Jacket: OD:8.6±0.15MM
- Color: Black(NK-K01), (C20276324-1)

- Connector: P1&P2: DVI 25P: 24P+Key Male, Gold Flash Contact, Nickel Plated Shell
- Shield: P1 & P2 Copper Foil 360° soldered to connector shell & cable shielding
- Hood P1&P2: Molded Type, PVC 45P, Color: Black

**Electrical:**

- 100% Open Short & Mis Wire Test
- Contact Resistance: 3Ω Max
- Insulation Resistance: 10Ω Min
- Hi-Pot Voltage 300V DC

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Name	Chappell	Drawn	11.07.11
Title		Approved	
DVI-D <=> DVI-D Dual Link Cable, 5 Meters			
Drawing No.			

**Item No.**  
**AK621N-5-R**



**rev00**

Replace Sheet